

PRI / Cellular Gateways

HG-3000 series



- All in one telephony platform
- PBX's connectivity for VoIP, Cellular and Fixed networks
- Fast return on investment (ROI)
- Optimal solution from small to Medium enterprises

Overview

The HyperGateway family of scalable platforms empowers flexible and cost-effective telephony over wireline, cellular and IP networks. Optimized for medium-to-large enterprises and alternative service providers, HyperGateway systems provide integrated voice communications for both onsite and remote users


HG-3000 series

The HG-3000 Series of PRI / Cellular Gateways provide superior voice technology for connecting PBX systems and IP-base systems with both GSM and CDMA networks. The HG-3000 Series enables inbound and outbound for both GSM, CDMA and PSTN calls and optional support of VoIP calls – all in one compact box. Given the systems' flexibility, modularity and scalability, the gateways can be pre-configured to meet precise customer requirements. Companies can easily expand the cost-effective systems to meet their evolving telephony needs over time.



The HG-3000 Series supports the HyperSaving Package – a corporate communications add-on that minimizes expenses of local, national and international calls. HyperSaving Package includes any combination of Corporate Callback, Corporate Callorder and Corporate Callthrough services that improve the organization's bottom line.

Features	Benefits
Scalable and flexible systems	Configured to meet precise customer requirements
12-32 GSM and CDMA channels	PBX inbound and outbound calls into and from Cellular.
PBX Interfaces	Configurable ISDN-PRI for Cellular
VoIP interface ready	Connecting legacy PBX and new IP-based systems.
HyperSaving Package	Minimizes expenses of local, national and international calls

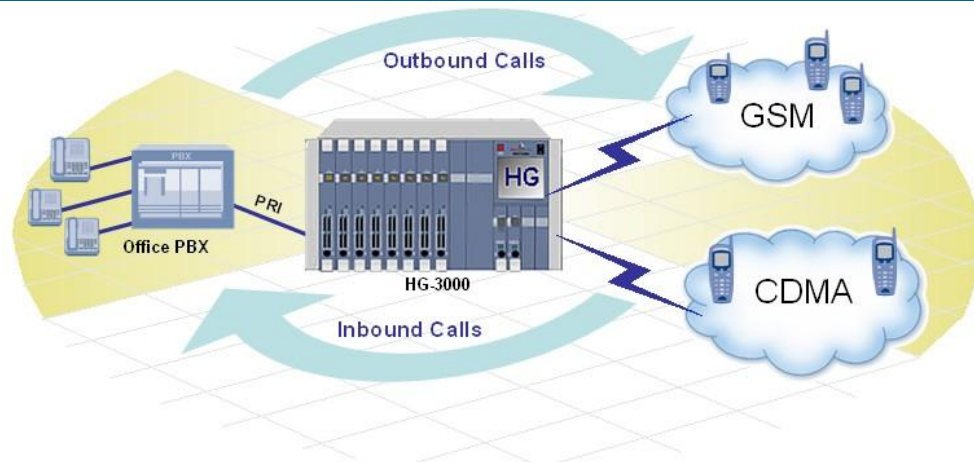

HyperGateway System Platform specifications:

Interfaces/Protocols

PRI:	DSS1 (Q.931, national variants), SS7-ISUP optional (Q.767), QSIG-BC, E1/T1, TE/NT, CRC4/double frame
BRI:	Optional
GSM:	Ericsson GM47/48, dual band (900/1800 or 900/1900 MHz), One antenna per four channels
CDMA:	Motorola C18
TDMA:	Supported
IP/Ethernet:	10/100 Base-T, RJ-45

Voice over IP

Voice Compression:	GSM, G.723.1 (MP-MLQ), G.729a (CSA-Celp), G.711 (PCM)
Fax Support:	Group 3, T38 compliant
Echo Cancellation:	G.168
Signaling:	H323 (Q931, H245, RAS & RTP/RTCP), SIP (optional), QoS (RSVP, DiffServ)
Call Setup:	Either integrated or on external server

Management & Control

Web-Based Management:	Hardware configuration, online port status and call statistics
------------------------------	--

Antennas (Optional)

YAGI:	13dB, high-quality, high-gain directional outdoor antenna with scalable cable from 10-30 m
Omni-directional:	3dB, indoor antenna with 3 m cable

General

Dimensions:	482 x 266 x 280 mm (84HP x 6U x 280 mm)
Weight:	Minimum 7kg (based on the system configuration)
Housing:	19" rack-mountable
Power:	Max 230VA, 100-240VAC
Certification:	CE

Environmental

Temperature:	+5°C to +45°C
Humidity:	5% to 95% (non-condensing)

Note: technical data is subject to change without prior notice.

