


RedCONNEX MAX+ AN-80i

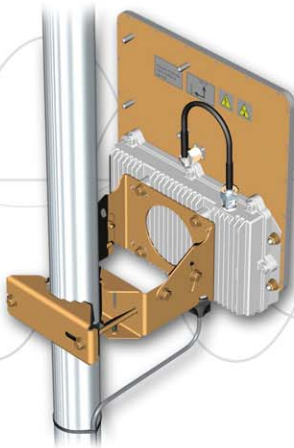

Features:

- Operates in the 3.3–3.8 GHz band
- Up to 100 Mbps over the air
- Up to 70 Mbps of Net Ethernet throughput
- Exceptional long-range capabilities
- Lowest end-to-end latency in its class
- Suitable for cellular backhaul
- Flexible channel size and speed selections
- Dynamic time division duplex (TDD) transmission
- Software upgradable to RedACCESS point-to-multipoint
- All outdoor configuration with IEEE 802.3af PoE

The RedCONNEX™ MAX+ AN-80i is a carrier-class licensed Ethernet product designed to provide long range point-to-point links in the 3.3–3.8 GHz WiMAX bands. Leveraging the core OFDM MAC and PHY technology incorporated in Redline's award-winning Broadband Wireless Infrastructure (BWI) product family, the RedCONNEX MAX+ AN-80i is optimized for applications which require higher throughput, or lower latency than can be achieved with WiMAX access equipment. Key applications include cellular backhaul, high throughput enterprise services and point-to-point connections.

The RedCONNEX MAX+ AN-80i has been designed to meet the ETSI spectral mask for international markets, and FCC part 90 compliance for use in the United States in the 3.65–3.70 GHz band.

The AN-80i is an all outdoor hardware platform powered by an industry standard Power over Ethernet (PoE) feed. The AN-80i is the most robust and reliable platform in its class, HALT accelerated life tested, with an IP67 rated outdoor enclosure and industry leading MTBF. The platform can be software upgraded between 9 and 90 Mb/s of net throughput allowing operators the commercial flexibility to pay as they grow. Available with a wide variety of antennas, the system includes an audible antenna alignment indicator and a built-in spectrum analyzer function for quick and simple installation. The product is manageable through the use of a standard Web browser or through Redline's SNMP based element management system, RMS.

Redline's family of Broadband Wireless Infrastructure (BWI) products consists of both RedCONNEX point to point and RedACCESS point to multipoint solutions, available through different installations of software. Unlike 802.11 based systems, the core engine of the BWI products is based on the IEEE 802.16 family of standards with proprietary extensions designed around achieving high throughput and low latency in order to optimize performance for backhaul and premium access applications. It is this core MAC/PHY engine, that allows Redline's BWI products to achieve the best latency, highest throughput and greatest line-of-sight (LOS) and non line-of-sight (NLOS) range in the industry.

Industry-Leading Broadband Wireless Solutions

Redline solutions deliver an unmatched combination of range, capacity, security, and reliability, even under the most challenging environmental conditions. Redline's best-in-class data rates and spectral efficiencies conserve valuable spectrum and reduce the cost of providing high-performance access. Redline solutions combine built-in security encryption with robust, extreme distance / high-bandwidth performance to deliver products that provide the reliability network operators and carriers need to grow their systems into the future.

RedCONNEX MAX+ AN-80i Preliminary System Specifications

System Capability:	LOS, optical-LOS, and non-LOS (OFDM)	Over the Air Encryption:	Proprietary private key encryption AES-128 and AES-256 options ²
RF Band:	3.300–3.800 GHz ¹ , TDD	Network Connection:	10/100 Ethernet (RJ-45)
Channel Size:	5, 7, 10, 14, 20, 28 MHz (software selectable)	System Configuration:	HTTP (Web) interface, SNMPv2, Telnet
Data Rate:	Up to 100 Mbps (over the air rate) Up to 70 Mbps (ethernet rate)	Element Management:	RMS platform support
Max Tx Power:	25 dBm (region specific)	Operating Temp:	-40 to 60 degrees celcius
Rx Sensitivity:	-95 dBm @ 1.5 Mbps max.	Power Consumption:	Standard IEEE 802.3af (15.4 W Max.)
PoE Cable:	Up to 91m (300 ft)	Power Supply:	110/220/240 VAC 50/60 Hz 18-60 VDC
Network Attributes:	Transparent bridge, 802.3x, 802.1p, automatic link distance ranging, DHCP pass-through	Compliance:	IEC, EN, and UL/CSA 60950 EN 301 489-1, EN 301 489-17 Industry Canada RSS 192, FCC part 90, ETSI EN 302 326-2
Modulation:	BPSK to 64 QAM bidirectional dynamic adaptive		
Dynamic Channel Control:	DFS, ATPC		
MAC:	PTP, concatenation, ARQ		

1. Availability restricted by regional regulations

RedCARE Support

Redline's complete family of RedCONNEX products is backed by the best support programs in the industry. Redline's exceptional network of highly trained Certified Partners provides responsive customer and solution support everywhere Redline's products are available – all fully backed by Redline's RedCARE program.

The RedCARE program is backed by Redline's decade of experience in deploying OFDM solutions for both WiMAX and backhaul network deployments. The program is delivered through a dedicated team of certified professionals. RedCARE ensures consistent, broadband wireless connectivity for our customers.

Redline Management Suite (RMS)

The award-winning Redline Management Suite (RMS) is a sophisticated element management solution that gives broadband network operators the ability to easily deploy, control, monitor and upgrade their Redline components network-wide through an intuitive, user-friendly GUI. The RMS acts as a gateway between the Redline equipment in the network and the NMS and OSS/BSS, enabling full automation in the system.

About Redline Communications

Redline Communications is the leading provider of fixed and mobile standards-based wireless broadband solutions. Redline's RedMAX™ WiMAX Forum Certified™ system, RedMAX 4C Mobile WiMAX™ products, and its award-winning broadband wireless infrastructure family of products – RedCONNEX™ and RedACCESS™ – enable service providers and other network operators to cost-effectively deliver high-bandwidth services, including voice, video and data communications. Redline is committed to maintaining its wireless industry leadership with the continued development of WiMAX and other advanced wireless broadband products. With more than 75,000 installations in 80 countries, and a global network of over 140 partners, Redline's experience and expertise helps service providers, enterprises and government organizations roll out wireless broadband networks to support advanced communications.

