

The Exinda 4061

Unified Performance Management for Medium/Large Branch Offices



The Exinda 4061

Designed for medium to large branch offices, the 4061 model expands to support up to 250 Mbps worth of traffic and up to 1,000 users.

Built upon Exinda's new 64bit architecture, and featuring a multi queue network interface controller (NIC) combined with a multi threaded operating system (OS); this new model offers scalability and performance at a price that satisfies even the most cost-conscious buyers.

The Challenge

Everyday more and more data is being pushed across our networks. Increased growth and reliance of web based applications, VoIP, streaming video and Internet usage have congested our networks and made them unreliable. Network users are spending more and more time waiting at screen (TWAS) as applications compete for finite resources over stressed, over-run networks. This proliferation of traffic has degraded our networks' speed and performance and resulted in productivity losses.


The challenge faced by IT professionals today, is how to gain visibility into the network, identify what applications and users are causing the congestion and put policies in place to ensure applications and data run smoothly over your network, despite the ever-increasing demand.

The Solution

Exinda provide users with the best network experience possible by maximizing the speed and efficiency of applications over the network.

Exinda's unified performance management (UPM) solution brings together a suite of advanced, best-of-breed, visibility, traffic-shaping and WAN optimization technologies into a single, easy to-use appliance designed to improve network productivity.

Exinda is the only unified performance management solution on the market. Controlled through a seamlessly integrated, unified management console, Exinda reduces costs, increases revenue and allows you to get the most out of your network.

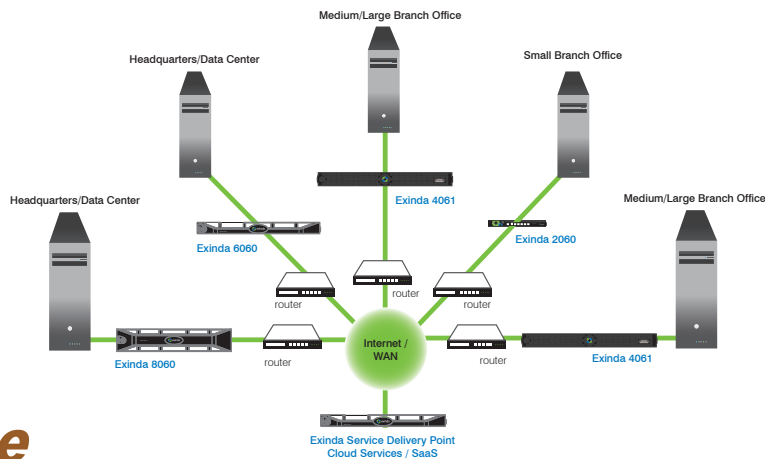

Visibility

Make informed decisions on managing applications, user experience, and performance.

Identification

- Layer 7 Classifications
- Heuristic Classification
- URL Classification
- Anonymous Proxy Detection
- Citrix Published Applications
- Active Directory User ID
- VoIP Codec

Performance

- Application Performance Scoring
- VoIP Mean Opinion Scoring (MOS)
- Service Level Agreements
- Network Efficiency & TCP Health

Reporting

- Drill Down Capabilities
- Real Time Monitoring
- Top Talkers/Top Conversations
- Automated PDF Reporting

Control

Guarantee predictable application performance and improve user experience.

Quality of Service

- QoS / Dynamic per IP / per User
- Application Predictability
- Bandwidth Guarantees & Limits
- Prioritization
- Traffic-shaping

Fairness

- Bandwidth Management
- Active Directory Integration
- Dynamic Bandwidth Allocation
- Over-subscription

Optimization

Improve application speed and user satisfaction.

Protocol & Application

- Layer 4 TCP Optimization
- Layer 7 Application Acceleration
- SSL Acceleration

Ease of Deployment

- Intelligent Flow Discovery
- Appliance Auto-Discovery
- Transparent (no tunneling)

Caching

- Universal Caching
- Data Deduplication
- Compression
- Video Caching
- Dynamic URL Caching
- Software Update Caching
- Web Object Caching

Exinda 4061 Hardware Specifications

| | |
|--------------------------------------|---|
| Form Factor | 19" 1U rack mount |
| Dimensions | 431 x 42.6 x 393.7 mm, 17.1" x 1.67" x 15.50" |
| Weight | 11.8 kg / 26 lb |
| CPU | Intel® Core™ i3 530 2.93GHz, 4M Cache, 2C/4T |
| RAM | 2GB Memory (1x2GB), 1333MHz, Dual Ranked UDIMM |
| HDD | 250GB 7.2k RPM Serial ATA 3Gbps 3.5-in |
| Data Store / Cache Size | 195GB |
| NICs (default) | 2 x 10/100/1000 copper (onboard) + 2 x 10/100/1000 copper bypass (slot 1) |
| NICs (expandable to) | 2 x 10/100/1000 copper (onboard) + 6 x 10/100/1000/10000 copper/fiber |
| Bridges/Bypass Pairs (default) | 1 |
| Bridges/Bypass Pairs (expandable to) | 3 |
| Interface NIC Slots | 1 |
| Console | RS-232 male DB-9 |
| Power Supply Type | Internal, Fixed |
| Power Rating | Single power supply (345W), Auto Ranging (100V~240V) |
| Environment | 0-40C, storage temp 20-80C relative humidity 0-90% (non-condensing) |
| Approvals | CE,FCC, Certified/RoHS |

Software Specifications

x700 Software Visibility & Control

x800 Software Visibility, Control & Optimization

| Licensed Bandwidth (full duplex) | 2 | 10 | 15 | 20 | 45 | 100 | 155 | 250 | 1 | 2 | 3 | 6 | 10 | 20 | |
|-----------------------------------|--------|---------|---------|---------|---------|---------|---------|---------|---------------------------|--------|--------|---------|---------|---------|-------|
| Max. Device Throughput (Mbps) | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | |
| Max. Concurrent Flows | 64,000 | 128,000 | 128,000 | 256,000 | 256,000 | 384,000 | 512,000 | 768,000 | 32,000 | 64,000 | 64,000 | 128,000 | 256,000 | 384,000 | |
| Max. L7 New Conn Rate | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 | |
| Reports (PDF) | 4 | 6 | 8 | 10 | 16 | 20 | 20 | 20 | 4 | 6 | 6 | 8 | 10 | 12 | |
| SLAs | 70 | 100 | 100 | 120 | 120 | 150 | 150 | 150 | 40 | 60 | 60 | 80 | 100 | 120 | |
| APS Objects | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | |
| Policies | 128 | 256 | 256 | 384 | 384 | 512 | 512 | 512 | 128 | 128 | 128 | 256 | 256 | 384 | |
| Edge Cache Max. Throughput (Mbps) | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Edge Cache Requests per Second | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | 1,500 | |
| | | | | | | | | | Optimized Connections* | 1,000 | 1,500 | 1,800 | 2,000 | 2,500 | 3,000 |
| | | | | | | | | | WAN Optimization (Mbps) | 1 | 2 | 3 | 6 | 10 | 20 |
| | | | | | | | | | Max WAN Shaped/QoS (Mbps) | 2 | 15 | 15 | 15 | 45 | 155 |
| | | | | | | | | | Disk Size (GB) | 250 | 250 | 250 | 250 | 250 | 250 |
| | | | | | | | | | Data Storage (GB) | 195 | 195 | 195 | 195 | 195 | 195 |

About Exinda ®

Exinda is a proven global supplier of WAN Optimization and Traffic Shaping products. The company has helped over 2,000 organizations in 80 countries worldwide to reduce network operating costs and ensure consistent application performance over the WAN. The Exinda Unified Performance Management (UPM) solution encompasses application visibility, control, optimization and intelligent acceleration – all within a single network appliance that is affordable and easy to manage.

